



BATTERIES SECOURUES

07.EMA.20.0606 / 07.EMA.31.0613 / 07.EMA.31.1213 / 07.EMA.33.0613
07.EMA.33.1213 / 07.EMA.4P.1213 / 07.EMA.4P.1224

MANUEL D'UTILISATION

WECO

Version UM.EMA.23D.V2.FR




- Le produit doit être installé par des techniciens professionnels.
- L'alimentation secteur doit être isolée avant l'installation.
- Ce produit est destiné à un usage intérieur uniquement.
- La batterie doit être rechargée tous les 6 mois.
- La batterie doit être changée après 4 ans.




commercial@wecofrance.fr - www.wecofrance.fr
WECO France, 2 Rue de l'Eusière, 06510 Carros, France


CABLAGE




07.EMA.20.xxxx



07.EMA.31.xxxx




07.EMA.33.xxxx



NOTE: P = Sortie stabilisée

07.EMA.4P.xxxx

DIMENSIONS ET INDICATEURS LED

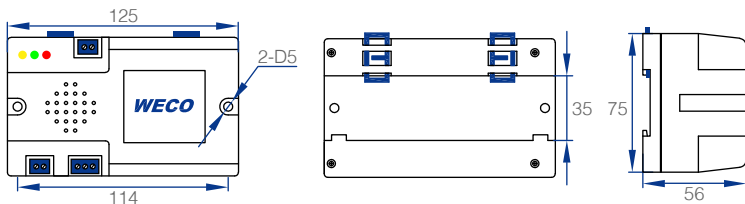

INDICATEURS LED STATUTS

●	En chargement
●	Charge complète
●	Urgence ou défaut

CARACTÉRISTIQUES TECHNIQUES

Modèle	07.EMA. 20.0606	07.EMA. 31.0613	07.EMA. 33.0613	07.EMA. 31.1213	07.EMA. 33.1213	07.EMA. 4P.1213	07.EMA. 4P.1224
Spécification							
Tension d'entrée	100VAC - 240VAC						
Sortie	6VDC, 0.6A	6VDC, 1.3A	6VDC, 1.3A	12VDC, 1.3A	12VDC, 1.3A	12VDC, 1.3A	12VDC, 2.4A
Puissance d'urgence	2W alarme	5W lumière + 2W alarme					10W lumière + 2W alarme
Autonomie d'urg.	120mins@2W	60mins@5W				60mins@10W	
Alarme interne	N/A	N/A	110dB	N/A	110dB	110dB	110dB
Temps de charg.	>10 heures						
Capacité de la Batterie	3.7V, 1200mAh	3.7V, 2000mAh	3.7V, 2000mAh	7.4V, 2000mAh	7.4V, 2000mAh	7.4V, 2000mAh	7.4V, 4000mAh
Température de fonctionnement	-25°C to +50°C						
Température de stockage	-25°C to +80°C						



EMERGENCY PACK

07.EMA.20.0606 / 07.EMA.31.0613 / 07.EMA.31.1213 / 07.EMA.33.0613
07.EMA.33.1213 / 07.EMA.4P.1213 / 07.EMA.4P.1224

USER MANUAL

WECO

Version UM.EMA.23D.V2.ENG




- The product must be installed by professional technicians.
- The mains power must be isolated before installation.
- This product is for indoor use only.
- The battery pack must be recharged every 6 months.
- The battery pack must be changed after 4 years.




commercial@wecofrance.fr - www.wecofrance.fr
WECO France, 2 Rue de l'Eusière, 06510 Carros, France


WIRING




07.EMA.20.xxxx



07.EMA.31.xxxx




07.EMA.33.xxxx



NOTE: P = Stabilized output

07.EMA.4P.xxxx

DIMENSIONS AND LED INDICATORS

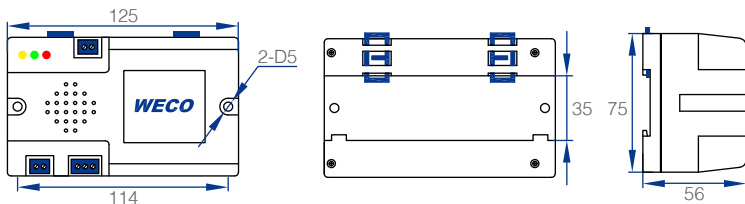

LED INDICATORS STATUS

- Charging
- Full charge
- Emergency or faulty

TECHNICAL FEATURES

Model	07.EMA. 20.0606	07.EMA. 31.0613	07.EMA. 33.0613	07.EMA. 31.1213	07.EMA. 33.1213	07.EMA. 4P.1213	07.EMA. 4P.1224
Specification							
Input voltage	100VAC - 240VAC						
Output	6VDC, 0.6A	6VDC, 1.3A	6VDC, 1.3A	12VDC, 1.3A	12VDC, 1.3A	12VDC, 1.3A	12VDC, 2.4A
Emergency power	2W alarm	5W light + 2W alarm					10W light + 2W alarm
Emergency time	120mins@2W	60mins@5W					60mins@10W
Internal alarm	N/A	N/A	110dB	N/A	110dB	110dB	110dB
Charging time	>10 hours						
Battery capacity	3.7V, 1200mAh	3.7V, 2000mAh	3.7V, 2000mAh	7.4V, 2000mAh	7.4V, 2000mAh	7.4V, 2000mAh	7.4V, 4000mAh
Working temperature	-25°C to +50°C						
Storage tempereature	-25°C to +80°C						