



DATA SHEET
DOOR DETECTOR POWER SUPPLY
03.G5.PWS.XN5

WECO


Dimensions

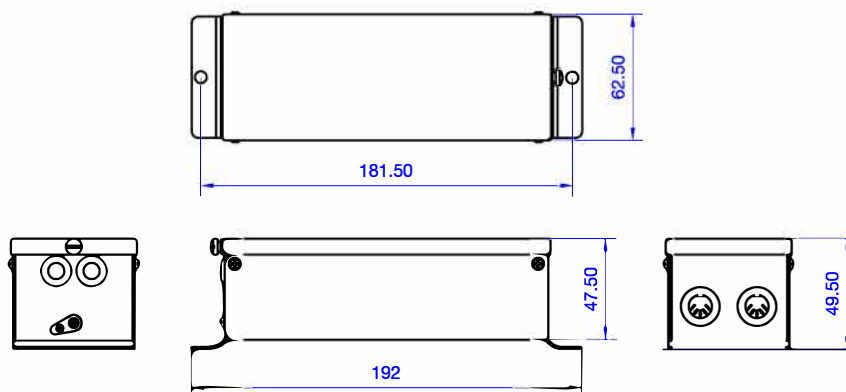

LED Indicators & Buzzer Settings

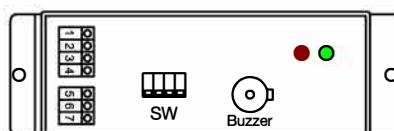


Red LED	●	ON	Beams obstructed or system fault
Red LED	○	OFF	Normal
Green LED	●	ON	Power on
Green LED	○	OFF	Power off



SW1	Buzzer functions	ON	Buzzer on	OFF	Buzzer off
SW2	Buzzer delay	ON	Delay 20s	OFF	Delay 30s
SW3	Buzzer active	ON	Infinite	OFF	60s
SW4	Buzzer setting	ON	Intermittent	OFF	Constant

Wiring

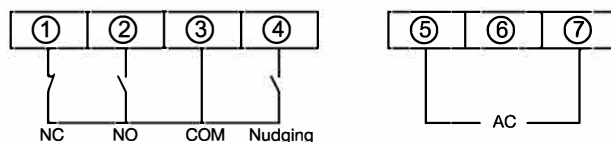

The nudging output will activate after 60 seconds of continuous interruption of the beams.
The relay will remain open during normal operation but will close when the nudging output is activated.

Model

03.G5.PWS.XN5.230	220VAC±15%, 50/60Hz, 4w
03.G5.PWS.XN5.110	110VAC±15%, 50/60Hz, 4w