

■ Rideaux infrarouges - Catégorie IV - SIL III

PRÉSENTATION PRODUIT

REPLACEMENT
CELLULE SICK



- Rideaux infrarouges Catégorie IV - SIL III
- Pour les remplacements des rideaux infrarouges SICK
- Application cabines sans porte ou en monte-chARGE en paroi lisse
- Conforme à la norme 95/16/EG et EN81
- Contrôle permanent du bon fonctionnement de la cellule
- La cellule autorise ou non le départ de l'appareil
- Communication permanente avec l'armoire de l'automate



INFORMATIONS TECHNIQUES



Profile

25mm



- Faisceaux : 16
- Environnement de fonctionnement : -20°/+65°, 100 000LUX, IP53
- Tolérance : Vertical +/-20mm - Horizontal +/-3mm
- Hauteur 1800mm ou 2000mm
- Dimensions du profil x25mm(L)x15mm(P)
- Hauteur de détection : 30mm-1730mm avec suppression automatique des faisceaux et mise en mémoire
- Alimentation 230VAC

PROFIL DE PROTECTION ET DE FIXATION ET BOITIER

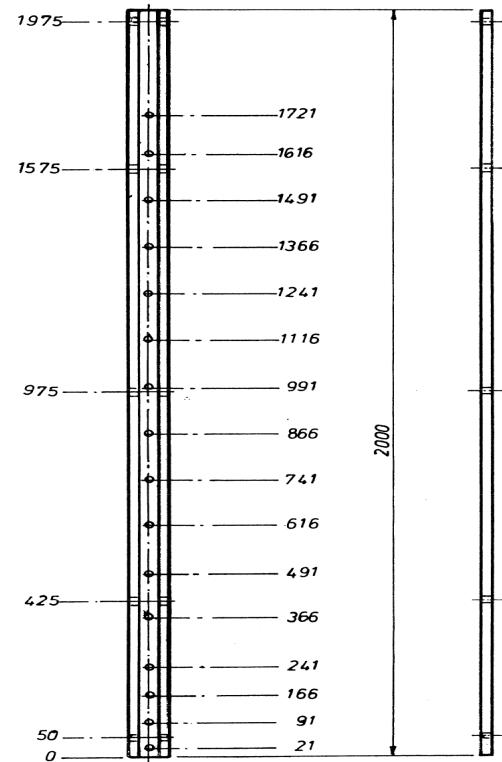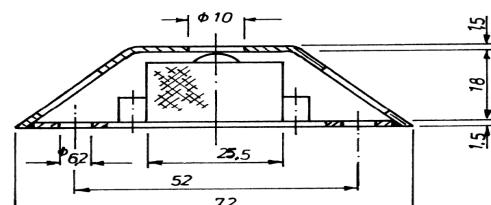


RÉFÉRENCES

Référence	Désignation
03.G5.CAT4.18/20/25	Rideaux infrarouges CAT IV - SIL III - Hauteur 1800mm / 2000mm / 2500mm
03.G5.CAT4.PROTECT/2	Profil de protection et de fixation pour Rideaux infrarouges CAT IV - Hauteur 1800mm ou 2000mm
03.G5.CAT4.CTB	Boîtier rideaux infrarouges catégorie IV

■ Door detectors - Category IV - SIL III

PRODUCT PRESENTATION

REPLACING
DOOR DETECTOR
«SICK»

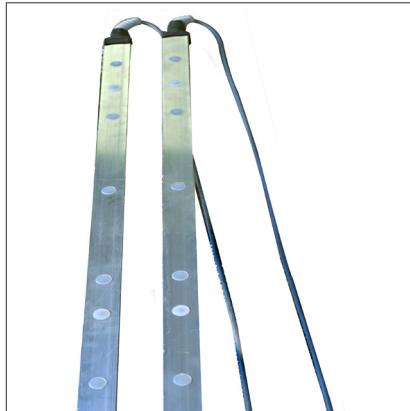

- Door detectors Category IV - SIL III
- For replacement of the idoor detector SICK
- Suitable for cabins without doors
- Compliant with standard 95/16/ EG and EN81
- Improve control of door detectors
- Continuous monitoring of the functioning of the door detector
- The door detectors allows or not the start of the elevator



TECHNICAL INFORMATION

Profile



25mm



15mm

- Beams: 16
- Operating environment: -20°/+65°, 100 000LUX, IP53
- Tolerance: Vertical +/-20mm - Horizontal +/-3mm
- Height 1800mm or 2000mm
- Dimensions of the profile x25mm(L)x15mm(D)
- Detecting height: 30mm-1730mm
- Power supply 230VAC

PROTECTION/FIXING PROFILE & POWER SUPPLY

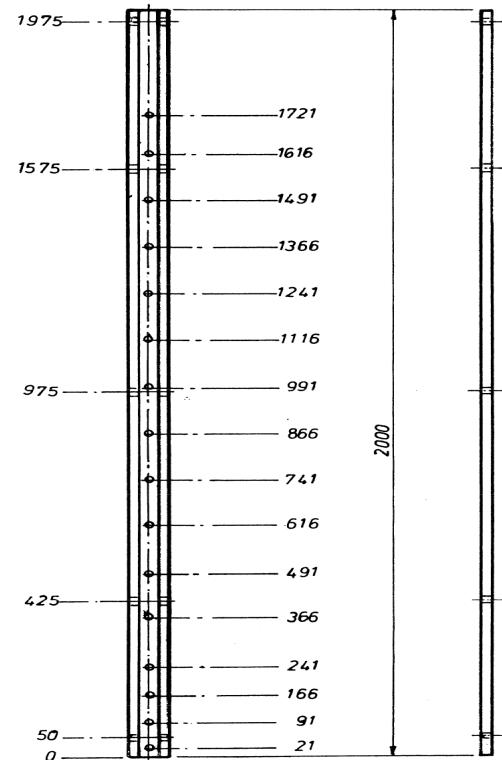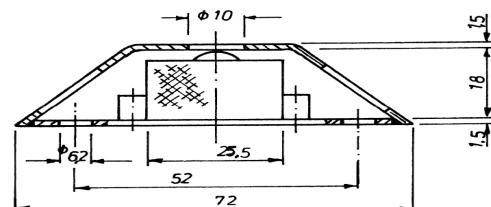

PART NUMBERS

Part Numbers	Designation
03.G5.CAT4.18/20/25	Door detectors CAT IV - SIL III - Height 1800mm / 2000mm / 2500mm
03.G5.CAT4.PROTECT/2	Protection/fixing profile for door detectors CAT IV - Height 1800mm or 2000mm
03.G5.CAT4.CTB	Power Supply for CAT IV