


FICHE PRODUIT

RIDEAU INFRAROUGE

03.G5.J234.AC220

WECO

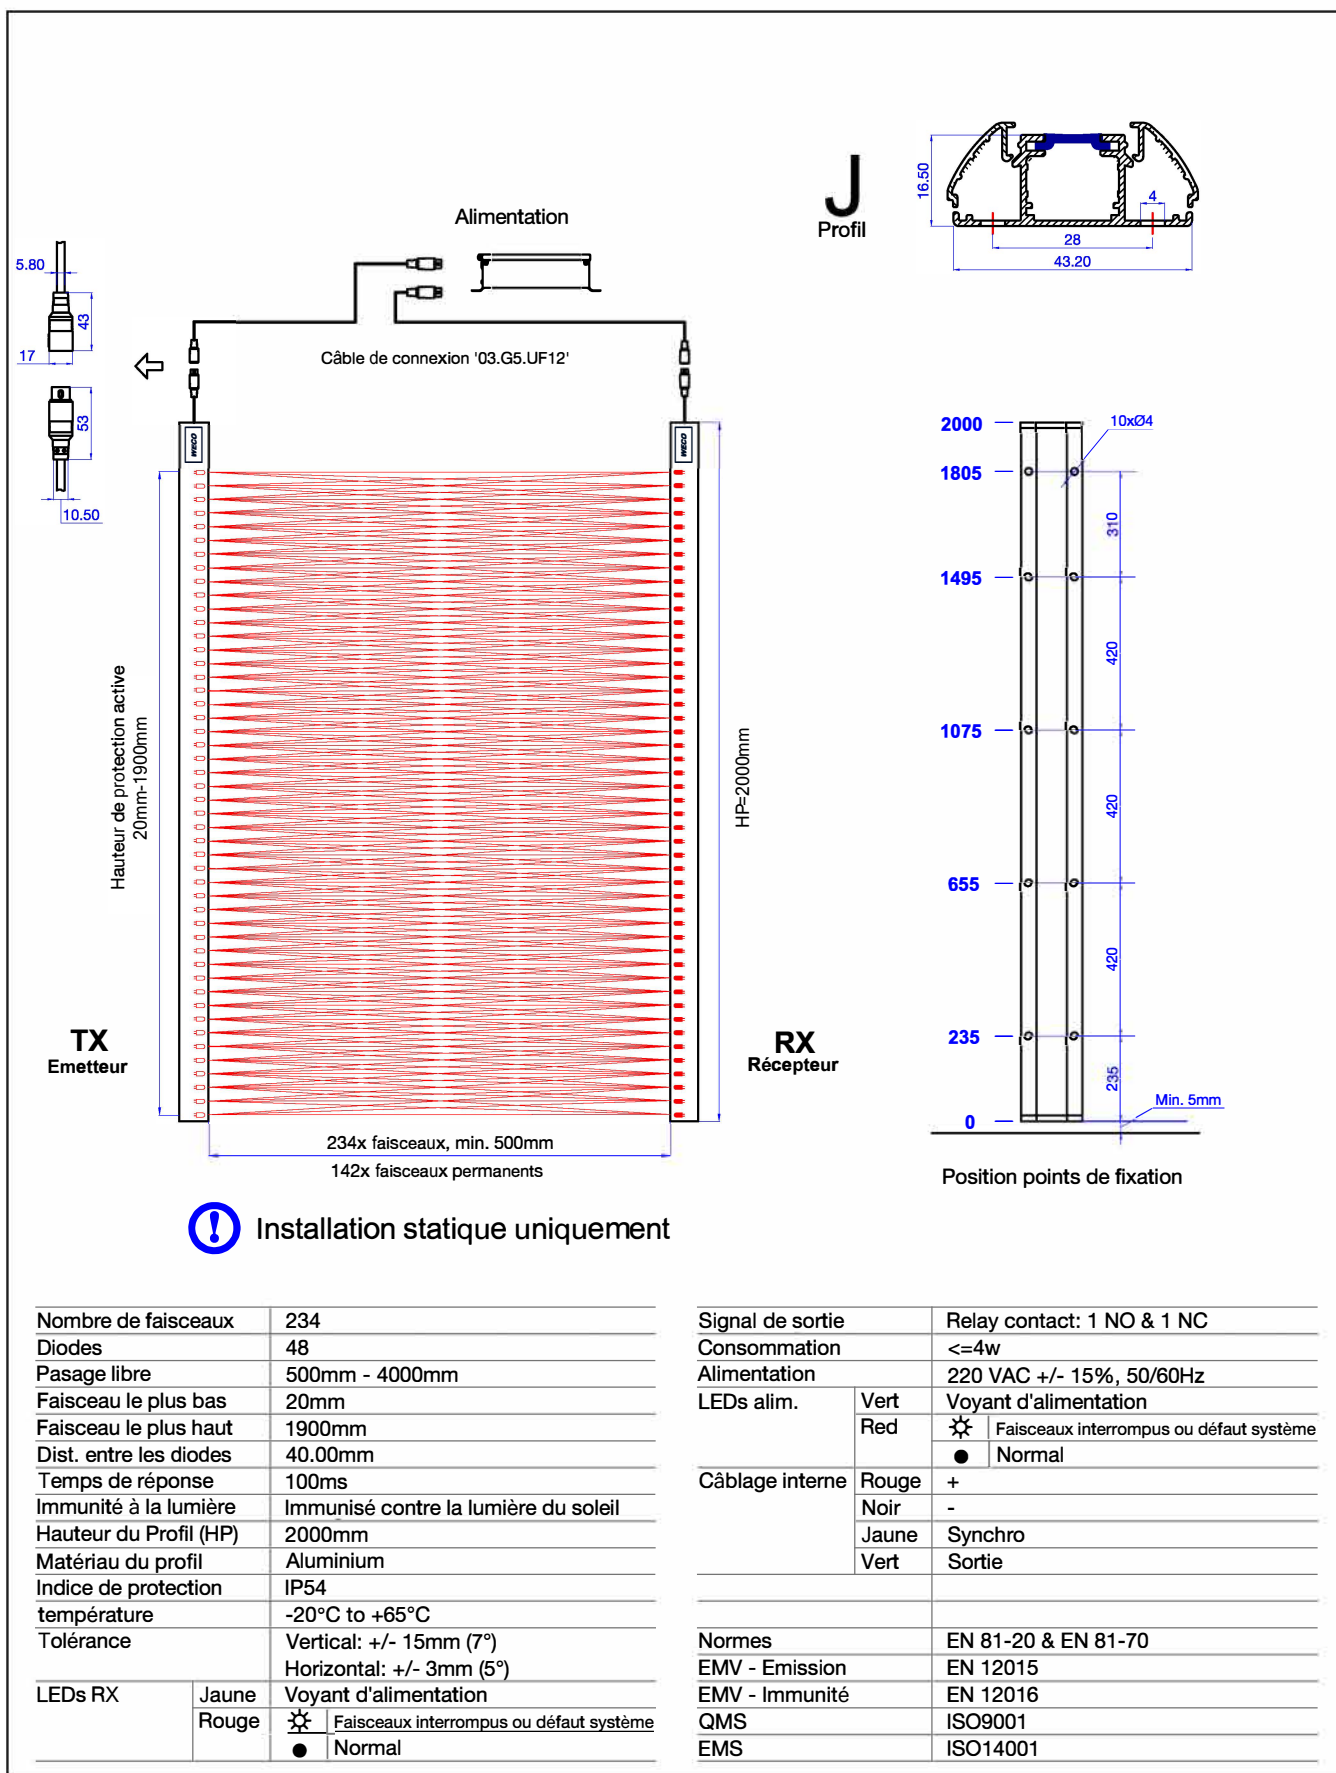


DATASHEET

DOOR DETECTOR

03.G5.J234.AC220

WECO

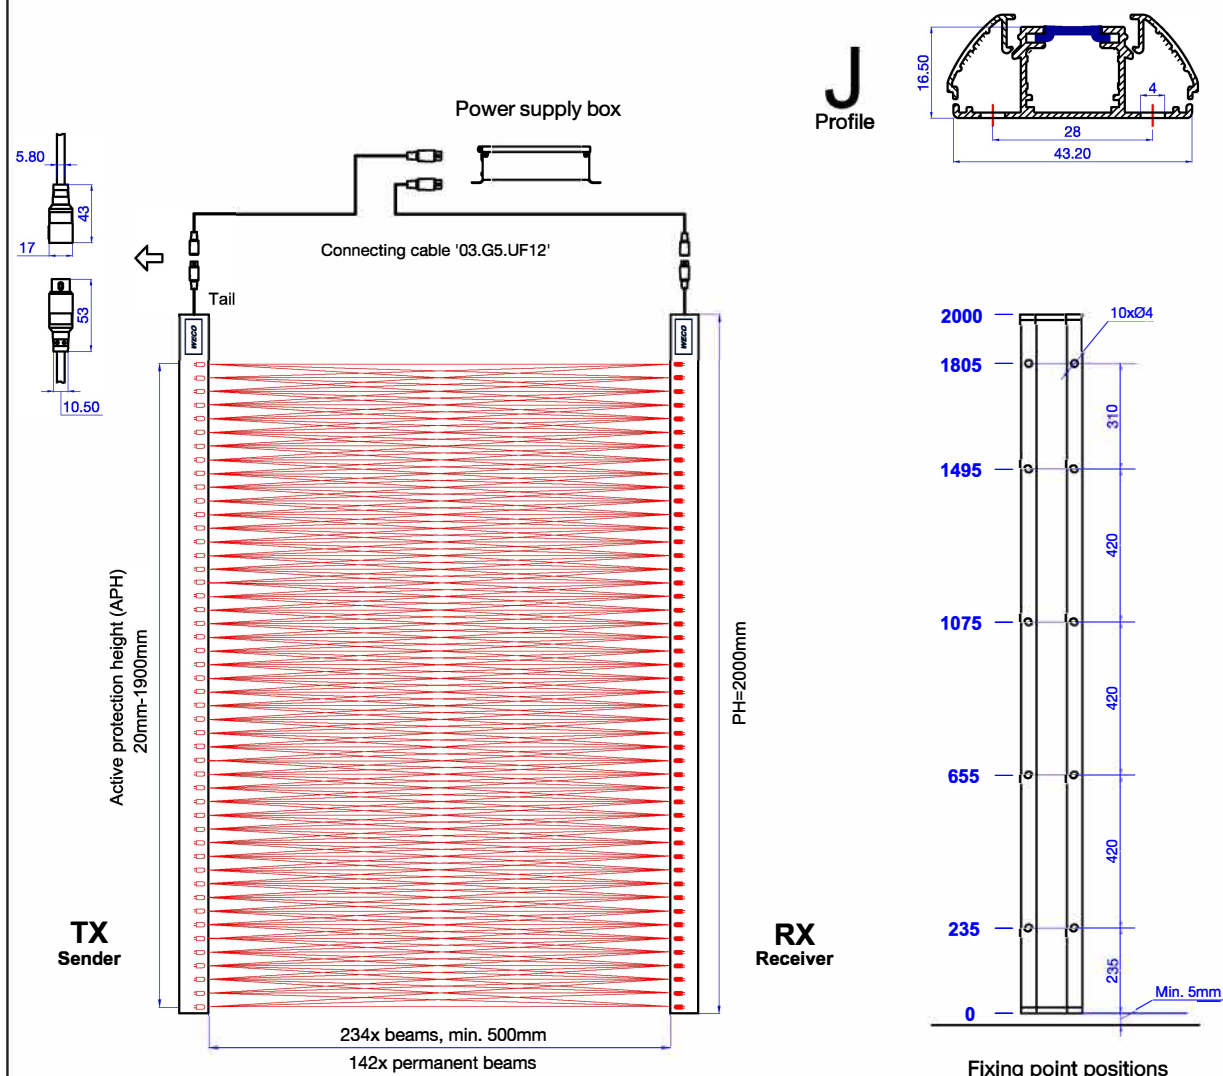

⚠ Static installation only

Max. number of beams	234
Diodes	48
Effective detecting dist.	500mm - 4000mm
Lowest beam (APH)	20mm
Uppermost beam (APH)	1900mm
Dist. between diodes	40.00mm
Response time	100ms
Light immunity	Sunlight immune
Profile height (PH)	2000mm
Profile material	Aluminium
Protection rating	IP54
Operating temperature	-20°C to +65°C
Alignment tolerance	Vertical: +/- 15mm (7°) Horizontal: +/- 3mm (5°)
LEDs in receiver	Yellow
	Red
	Power indicator
	⚡ Beams interrupted or system fault
	● Normal

Signal output	Relay contact: 1 NO & 1 NC
Power consumption	<=4w
Power supply voltage	220 VAC +/- 15%, 50/60Hz
LEDs in PWS	Green
	Red
	⚡ Beams interrupted or system fault
	● Normal
Internal wiring	Red
	Black
	Yellow
	Green
	+
	-
	Synchro
	Output
Norms	EN 81-20 & EN 81-70
EMV - Emission	EN 12015
EMV - Immunity	EN 12016
QMS	ISO9001
EMS	ISO14001