


FICHE PRODUIT
RIDEAU INFRAROUGE
03.G5.M65.174FED22

WECO

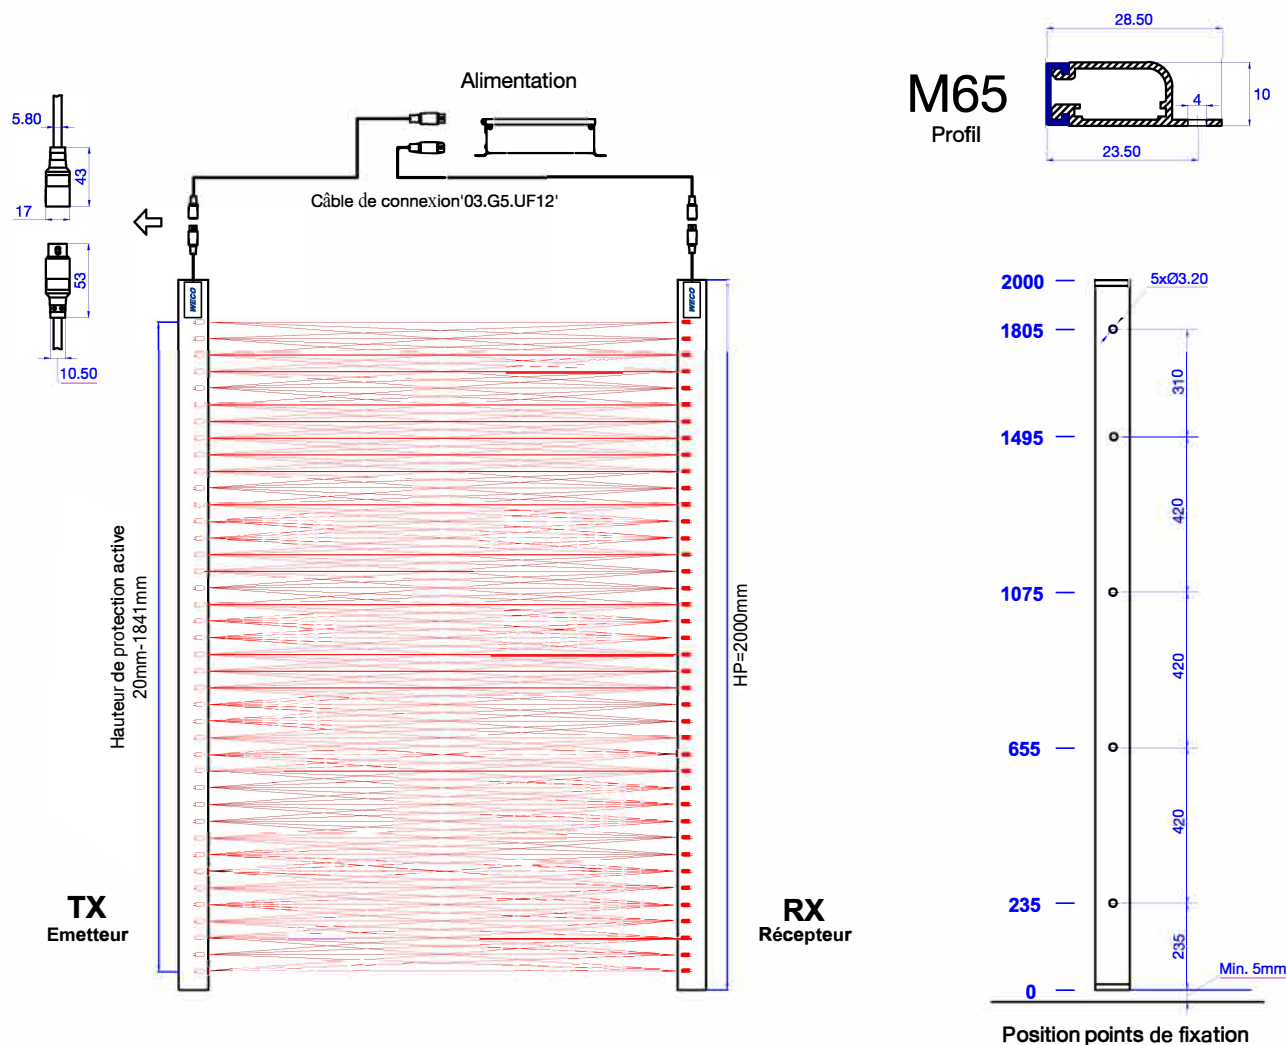




Nombre de faisceaux		174
Diodes		36
Passage libre		0mm - 4000mm
Faisceau le plus bas		20mm
Faisceau le plus haut		1841mm
Dist. entre les diodes		47.50mm
Temps de réponse		100ms
Immunité à la lumière		Immunisé contre la lumière du soleil
Hauteur du profil (HP)		2000mm
Matériau du profil		Aluminium
Indice de protection		IP65
Température		-20°C to +65°C
Tolérance		Vertical: +/- 15mm (7°) Horizontal: +/- 3mm (5°)
LEDs RX	Jaune	Voyant d'alimentation
	Rouge	 Faisceau interrompus ou défaut du système
		 Normal

Signal de sortie		Contact relais : 1 NO & 1 NC	
Consommation		<=4w	
Alimentation		230 VAC +/- 15%, 50/60Hz	
LEDs alim.	Vert	Voyant d'alimentation	
	Rouge		Faisceau interrompus ou défaut du système
			Normal
Câblage interne	Rouge	+	
	Noir	-	
	Jaune	Synchro	
	Vert	Sortie	
Normes		EN 81-20 & EN 81-70	
EMV - Emission		EN 12015	
EMV - Immunité		EN 12016	
QMS		ISO9001	
EMS		ISO14001	

DATASHEET
DOOR DETECTOR
03.G5.M65.174FED22

WECO

M65
Profile

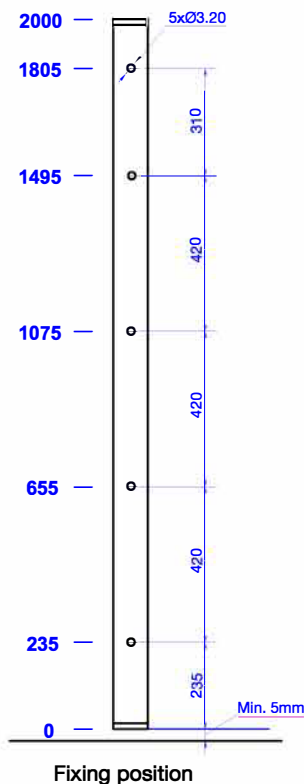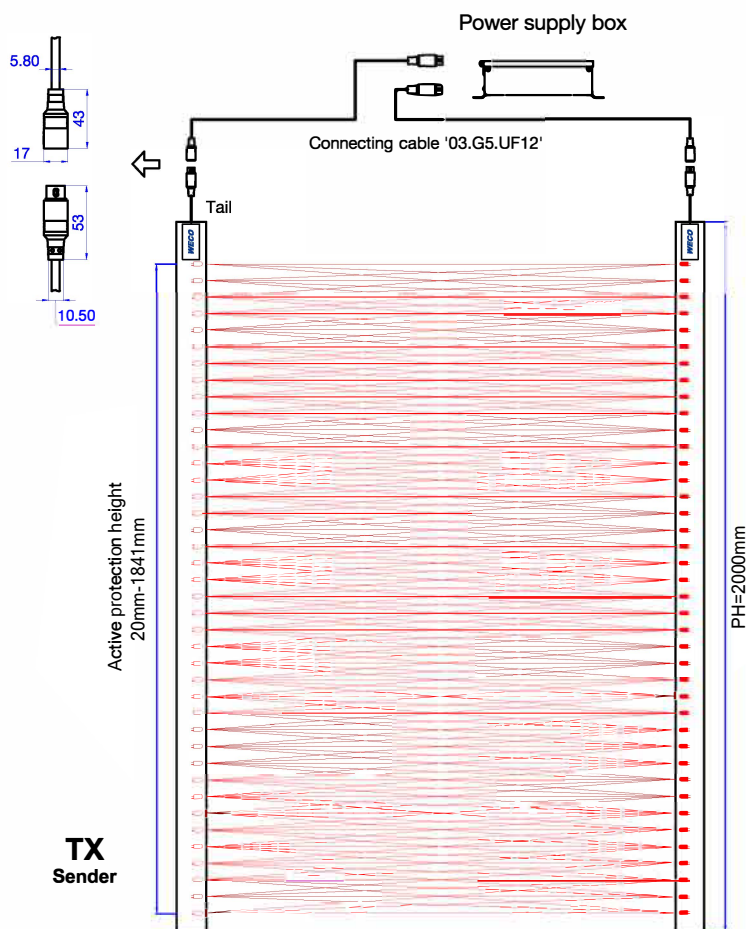

Max. number of beams	174
Diodes	36
Effective detecting dist.	0mm - 4000mm
Lowest beam (APH)	20mm
Uppermost beam (APH)	1855mm
Dist. between diodes	47.50mm
Response time	100ms
Light immunity	Sunlight immune
Profile height (PH)	2000mm
Profile material	Aluminium
Protection rating	IP65
Operating temperature	-20°C to +65°C
Alignment tolerance	Vertical: +/- 15mm (7°) Horizontal: +/- 3mm (5°)
LEDs in receiver	Yellow
	Red
	Power indicator
	⚡ Beams interrupted or system fault
	● Normal

Signal output	Relay contact: 1 NO & 1 NC
Power consumption	<=4w
Power supply voltage	230 VAC +/- 15%, 50/60Hz
LEDs in PWS	Green
	Red
	⚡ Beams interrupted or system fault
	● Normal
Internal wiring	Red
	Black
	Yellow
	Green
	+
	-
	Synchro
	Output
Norms	EN 81-20 & EN 81-70
EMV - Emission	EN 12015
EMV - Immunity	EN 12016
QMS	ISO9001
EMS	ISO14001