

FICHE PRODUIT




RIDEAU INFRAROUGE

03.G5.SIX.154.KAP.230

WECO

SIX

Profil

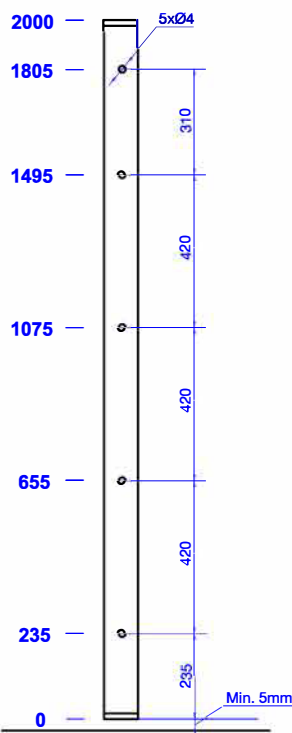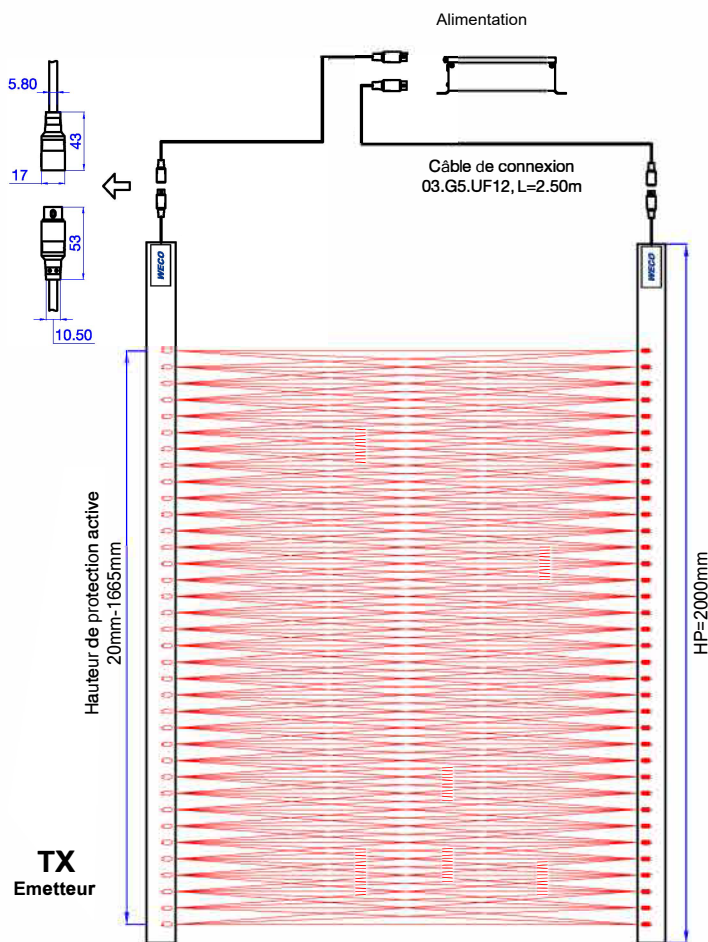

Position points de fixation

Nombre de faisceaux	154
Diodes	32
Passage libre	0mm - 4000mm
Faisceau le plus bas	20mm
Faisceau le plus haut	1665mm
Dist. entre les diodes	47.50mm
Temps de réponse	<100ms
Immunité à la lumière	>100,000lux
Hauteur du profil (HP)	2000mm
Matériau du profil	Aluminium
Indice de protection	IP54
Température	-20°C to +65°C
Toérance	Vertical: +/- 15mm (7°) Horizontal: +/- 3mm (5°)

LEDs RX	Jaune	Voyant d'alimentation	
	Rouge	☼	Faisceaux interrompus ou défaut système
		●	Normal
Signal de sortie		Relay contact: 1 NO & 2 NC	
Consommation		<=4w or 100mA@DC24V	
Alimentation		230VAC±15%	
LEDs alim.	Vert	Voyant d'alimentation	
	Rouge	☼	Faisceaux interrompus ou défaut système
		●	Normal
Normes		EN 81-70	
EMV - Emission		EN 12015	
EMV - Immunité		EN 12016	
QMS		ISO9001	
EMS		ISO14001	




DATASHEET

DOOR DETECTOR

03.G5.SIX.154.KAP.230

WECO

SIX
Profile

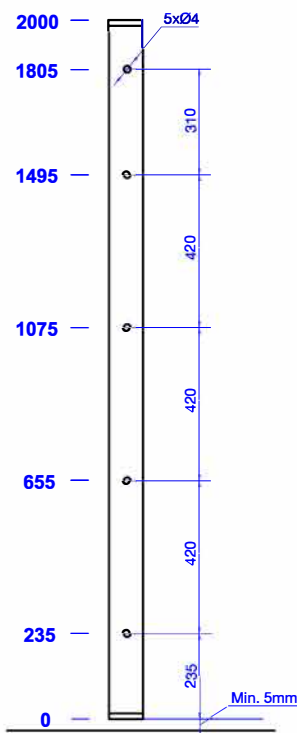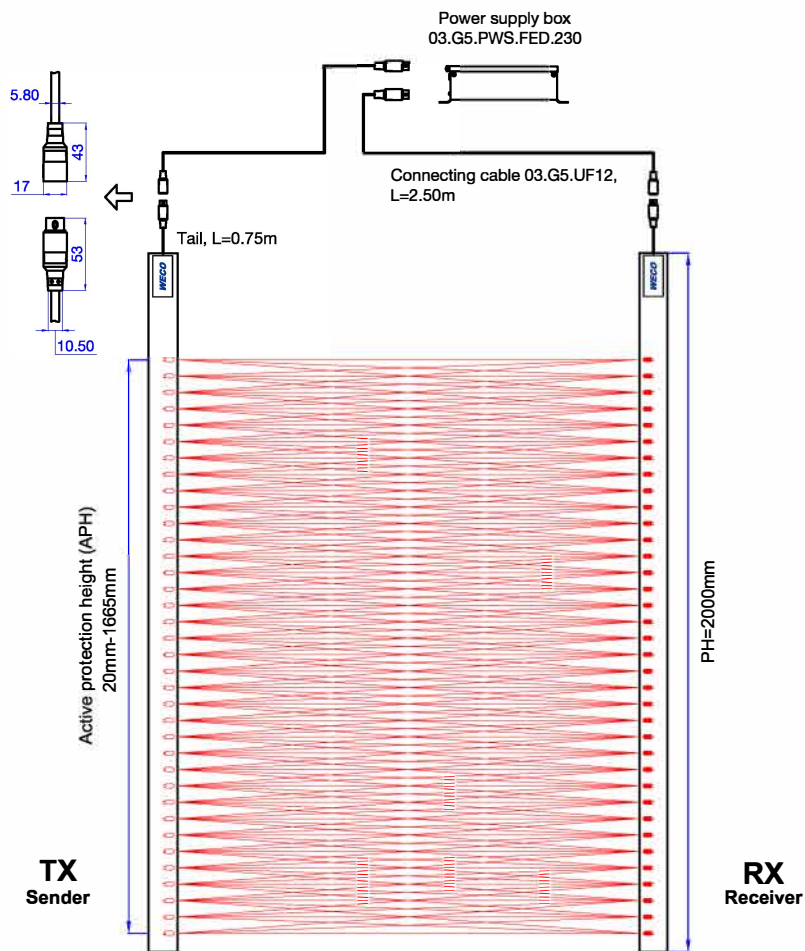

Fixing point positions

Max. number of beams	154
Diodes	32
Effective detecting dist.	0mm - 4000mm
Lowest beam (APH)	20mm
Uppermost beam (APH)	1665mm
Dist. between diodes	47.50mm
Response time	<100ms
Light immunity	>100,000lux
Profile height (PH)	2000mm
Profile material	Aluminium
Protection rating	IP54
Operating temperature	-20°C to +65°C
Alignment tolerance	Vertical: +/- 15mm (7°) Horizontal: +/- 3mm (5°)

LEDs in receiver	Yellow	Power indicator	
	Red	⚡	Beams interrupted or system fault
		●	Normal
Signal output		Relay contact: 1 NO & 2 NC	
Power consumption		<=4w or 100mA@DC24V	
Power supply voltage		230VAC±15%	
LEDs in PWS	Green	Power indicator	
	Red	⚡	Beams interrupted or system fault
		●	Normal
Norms		EN 81-70	
EMV - Emission		EN 12015	
EMV - Immunity		EN 12016	
QMS		ISO9001	
EMS		ISO14001	