


FICHE PRODUIT
RIDEAU INFRAROUGE
03.G5.SMX.194.FED230

WECO

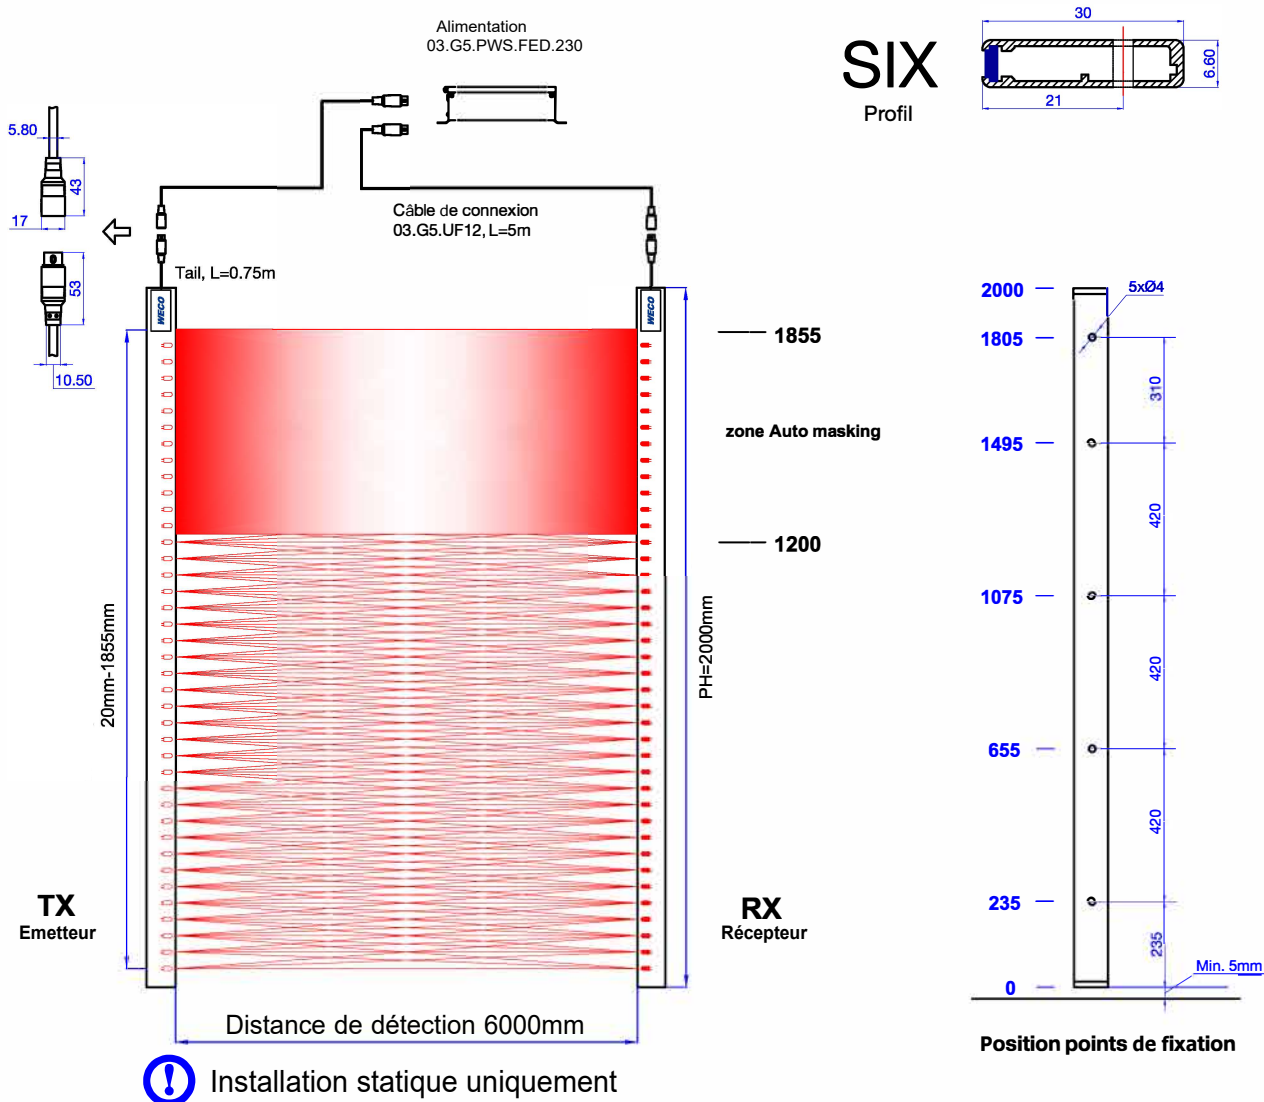


ⓘ Installation statique uniquement

Nombre de faisceaux	194
Diodes	40
passage libre	6000mm (installation statique)
Faisceau le plus bas	20mm
Faisceau le plus haut)	1855mm
Dist. entre les diodes	47.50mm
Temps de réponse	<100ms
Immunité à la lumière	>100,000lux
Hauteur du profil	2000mm
Matériau du profil	Aluminium
Indice de protection	IP54
T° de fonctionnement	-20°C to +65°C
Tolérance	Vertical: +/- 15mm (7°) Horizontal: +/- 3mm (5°)

LEDs RX	Jaune	Voyant d'alimentation
	Rouge	Faisceaux interrompus ou défaut du système Normal
Signal ode sortie		Contact relais: 1 NO & 2 NC
Consommation		<=4w or 100mA@DC24V
Alimentation		220VAC±15%
LEDs alim.	Vert	Voyant d'alimentation
	Rouge	Faisceaux interrompus ou défaut du système Normal
Normes		EN 81-20; EN 81-70
EMV - Emission		EN 12015
EMV - Immunité		EN 12016
QMS		ISO9001
EMS		ISO14001

DATASHEET
DOOR DETECTOR
03.G5.SMX.194.FED230

WECO

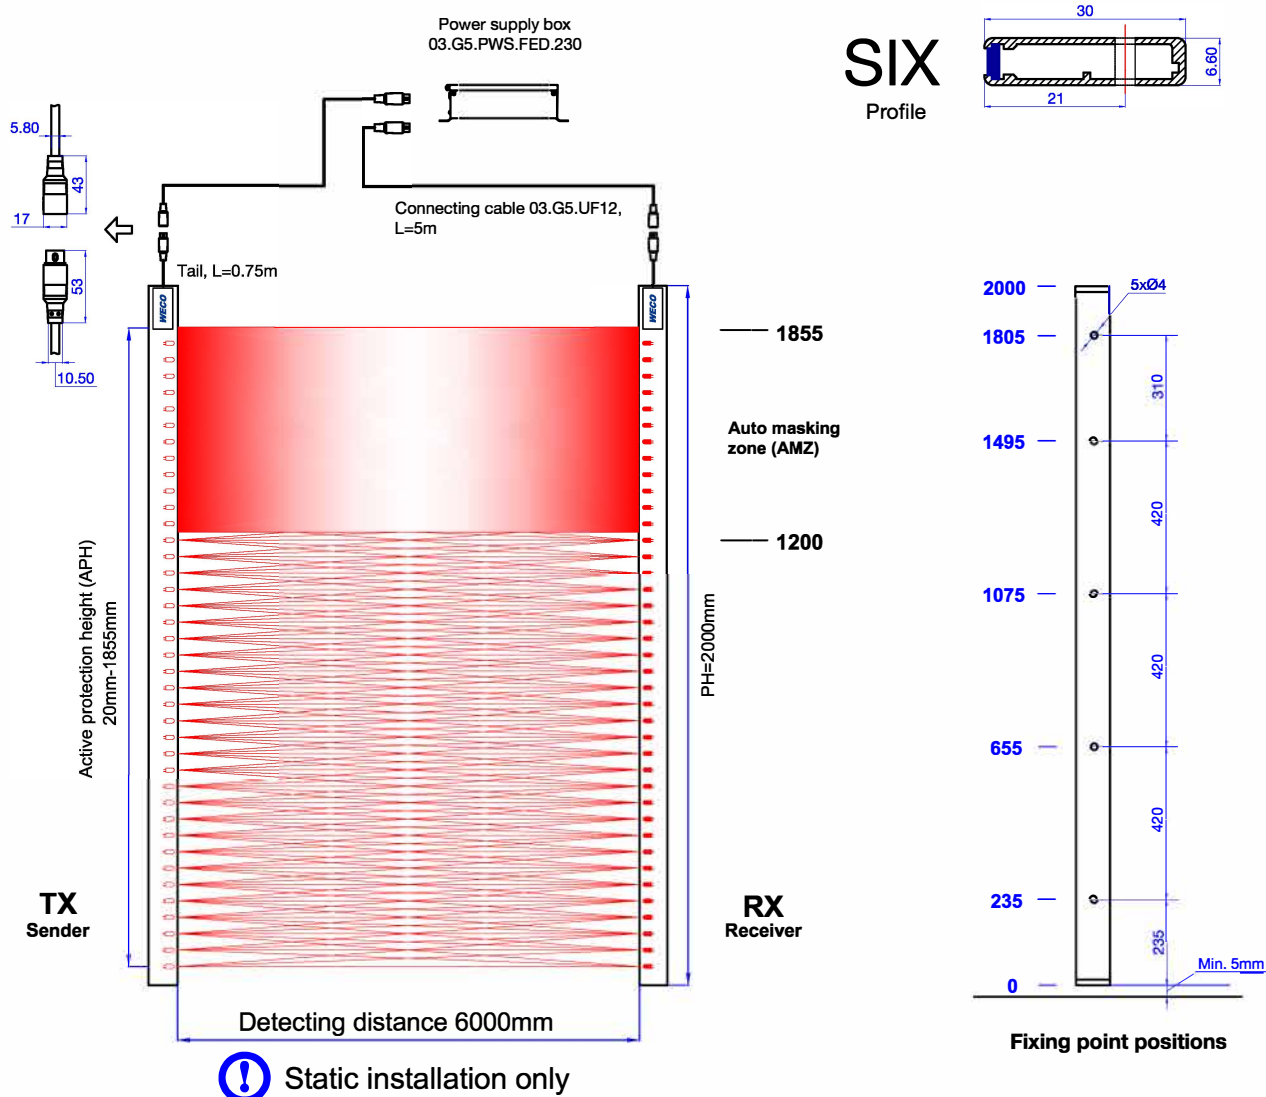

Max. number of beams	194
Diodes	40
Effective detecting dist.	6000mm (static installation only)
Lowest beam (APH)	20mm
Uppermost beam (APH)	1855mm
Dist. between diodes	47.50mm
Response time	<100ms
Light immunity	>100,000lux
Profile height (PH)	2000mm
Profile material	Aluminium
Protection rating	IP54
Operating temperature	-20°C to +65°C
Alignment tolerance	Vertical: +/- 15mm (7°) Horizontal: +/- 3mm (5°)

LEDs in receiver	Yellow	Power indicator	
	Red	⚡	Beams interrupted or system fault
		●	Normal
Signal output		Relay contact: 1 NO & 2 NC	
Power consumption		<=4w or 100mA@DC24V	
Power supply voltage		220VAC±15%	
LEDs in PWS	Green	Power indicator	
	Red	⚡	Beams interrupted or system fault
		●	Normal
Norms		EN 81-20; EN 81-70	
EMV - Emission		EN 12015	
EMV - Immunity		EN 12016	
QMS		ISO9001	
EMS		ISO14001	