




## ■ Batterie Nickel Cadmium Record STA15 12V 600MAh

### PRÉSENTATION DU PRODUIT

PHOTO	TYPE DE TAILLE	CHARACTERISTICS
	SC	<b>NI-CD STANDARD</b> <b>12V</b> <b>600 MAh</b> <ul style="list-style-type: none"> <li>Tension nominale : 12 V</li> <li>Capacité nominale (20 heures) : 600MAh</li> <li>Poids (environ) 420g</li> </ul>

### SPÉCIFICATIONS TECHNIQUES

Capacité (mAh)	Nominale	600
	Minimum	600
Charge	Standard	60mA×15hrs
	Rapide	600mA×1,5hrs, avec - V, Contrôle du temps
	A courant réduit	51~85mA
Poids	42g/cell	
Cycle de vie	≥500	
Tension en circuit ouvert	≥13V	
Tension de coupure de décharge	10V	
Rétention charge	≥450	
Impédance interne	≤25mΩ/cell	
Température recommandée (°C)	charge standard	0~+45°C
	Charge rapide	+10~+40°C
	Charge à courant réduit	0~+45°C
	Décharge	-20~+65°C
	Stockage	-20~+35°C

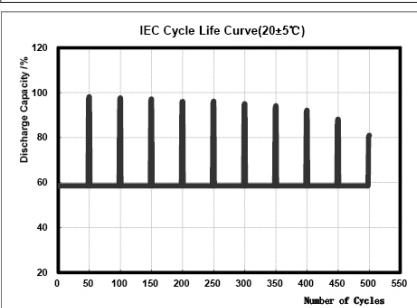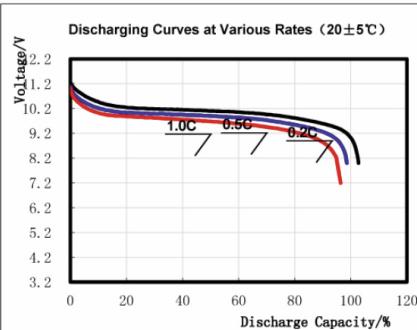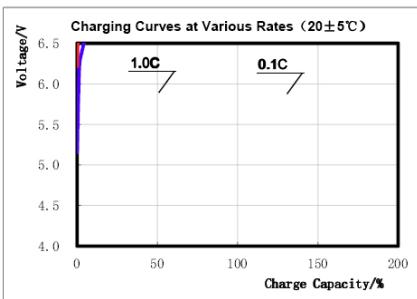

### REFERENCES

Référence	Description
WNC0.6-12ST	BATTERIE RECORD STA15 12V 600MAH NI CD

**Conseils de sécurité :** Utilisez UNIQUEMENT dans les paramètres autorisés.

Ne court-circuitez pas ni ne surchargez la batterie. Chargez-la uniquement à l'aide d'un chargeur approuvé conçu spécifiquement pour charger cette batterie.

Ne chauffez pas au-dessus des températures maximales indiquées. Ne pas écraser, mutiler, percer ou maltraiter la batterie.

Ne démontez pas le pack ni enlever aucun des dispositifs de protection ou circuits..

**NE PAS UTILISER LA BATTERIE SI VOUS SOUPÇONNEZ QU'ELLE PEUT ÊTRE DÉFECTUEUSE OU ENDOMMAGÉE.**






## ■ Nickel Cadmium Battery Record STA15 12V 600MAh

### PRODUCT PRESENTATION

PHOTO	SIZE TYPE	CHARACTERISTICS
	SC	<p>CELLTYPE STANDARD NI-CD</p> <p><b>12V</b></p> <p><b>600 MAh</b></p> <ul style="list-style-type: none"> <li>• Nominal Voltage : 12V</li> <li>• Rated Capacity (20 hours rate) : 600MAh</li> <li>• Weight (approx) 420g</li> </ul>

### TECHNICAL SPECIFICATIONS

Capacity (mAh)	Nominal	600
	Minimum	600
Charge	Standard	60mA×15hrs
	Quick	600mA×1,5hrs, with - V, Time control
Trickle		51~85mA
Weight	42g/cell	
Cycle Life	≥500	
Open Circuit Voltage (OCV)	≥13V	
Discharge cut-off voltage	10V	
Charge Retention	≥450	
Internal impedance	≤25mΩ/cell	
Temperature recommended (°C)	Standard charge	0~+45°C
	Rapid charge	+10~+40°C
	Trickle charge	0~+45°C
	Discharge	-20~+65°C
	Storage	-20~+35°C

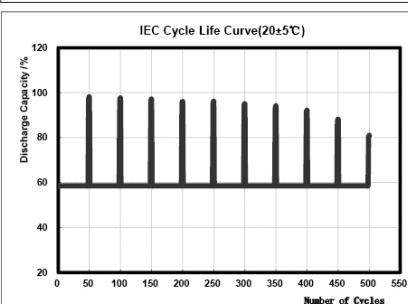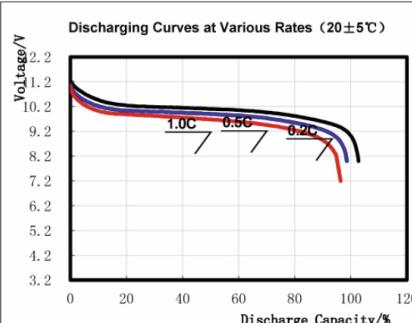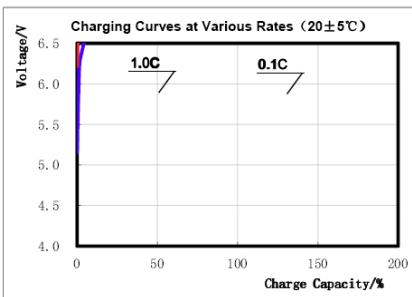

### REFERENCES

Reference	Description
WNC0.6-12ST	BATTERY RECORD STA15 12V 600MAH NI CD

**Safety Warning :** Use ONLY within the allowed parameters.

Do not short circuit or overload the battery. Charge only using an approved charger designed specifically to charge this battery.

Do not heat above maximum temperatures indicated. Never crush, mutilate, puncture or abuse the battery.

Do not dismantle the pack or disable any of the protective devices or circuits.

**DO NOT USE THE BATTERY IF YOU SUSPECT IT MAY BE FAULTY OR DAMAGED.**

