

■ BATTERIE BESAM EMD 18V 700MAH NI-CD

PRÉSENTATION DU PRODUIT

PHOTO



TYPE DE TAILLE SC

CARACTÉRISTIQUES

- Tension nominale : 18 V
- Capacité nominale (de 20 heures) : 700 MAh
- Poids (environ) 17,2 g/cellule




NI-CD
STANDARD

18V

700
MAH

SPÉCIFICATIONS TECHNIQUES

Capacité (mAh)	Nominale	700
	Minimum	700
Charge	Standard	70mA x 15hrs
	Rapide	700mA x 1.5hrs, avec - V, Contrôle du temps
	A courant réduit	21~35mA
Poids		17.2g/cell
Cycle de vie		≥500
Tension en circuit ouvert		≥19.5V
Tension de coupure de décharge		15V
Rétention de charge		≥525
Impédance interne		≤35mΩ/cell
Température recommandée (°C)	Charge standard	0~+45°C
	Charge rapide	+10~+40°C
	Charge à courant réduit	0~+45°C
	Décharge	-20~+65°C
	Stockage	-20~+35°C

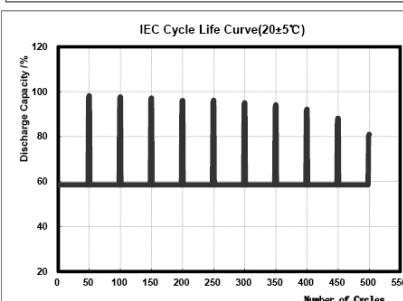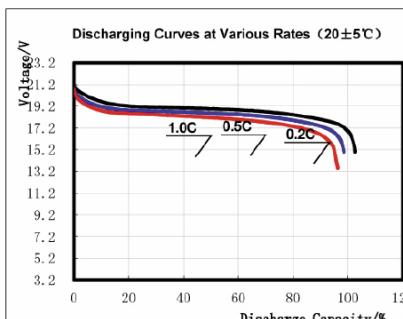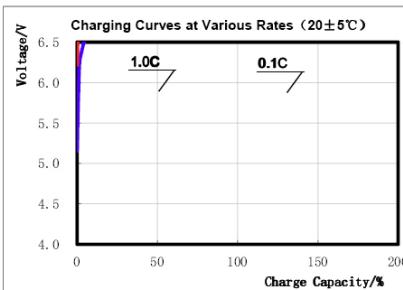

REFERENCE

Référence	Description
WNC700.18	BATTERIE BESAM EMD 18V 700MAH NI-CD

Conseils de sécurité : Utilisez UNIQUEMENT dans les paramètres autorisés.

Ne court-circuitez pas ni ne surchargez la batterie. Chargez-la uniquement à l'aide d'un chargeur approuvé conçu spécifiquement pour charger cette batterie.

Ne chauffez pas au-dessus des températures maximales indiquées. Ne pas écraser, mutiler, percer ou maltraiter la batterie.

Ne démontez pas le pack ni enlever aucun des dispositifs de protection ou circuits..

NE PAS UTILISER LA BATTERIE SI VOUS SOUPÇONNEZ QU'ELLE PEUT ÊTRE DÉFECTUEUSE OU ENDOMMAGÉE.






BATTERY BESAM EMD 18V 700MAH NI-CD

PRODUCT PRESENTATION

PHOTO	SIZE TYPE	CHARACTERISTICS	CELLTYPE STANDARD NI-CD	18V	700 MAH
	SC	<ul style="list-style-type: none"> Nominal Voltage : 18V Rated Capacity (20 hours rate) : 700MAh Weight (approx) 17.2g/cell 			

TECHNICAL SPECIFICATIONS

Capacity (mAh)	Nominal	700
	Minimum	700
Charge	Standard	70mA×15hrs
	Quick	700mA×1,5hrs, with - V, Time control
	Trickle	21~35mA
Weight	17.2g/cell	
Cycle Life	≥500	
Open Circuit Voltage (OCV)	≥19.5V	
Discharge cut-off voltage	15V	
Charge Retention	≥525	
Internal impedance	≤35mΩ/cell	
Temperature recommended (°C)	Standard charge	0~+45°C
	Rapid charge	+10~+40°C
	Trickle charge	0~+45°C
	Discharge	-20~+65°C
	Storage	-20~+35°C

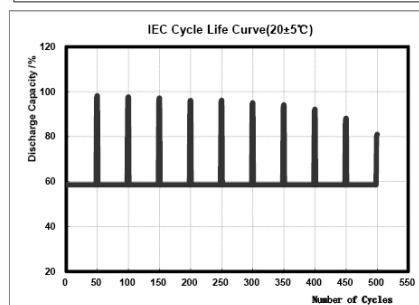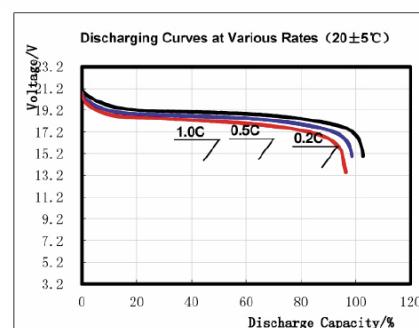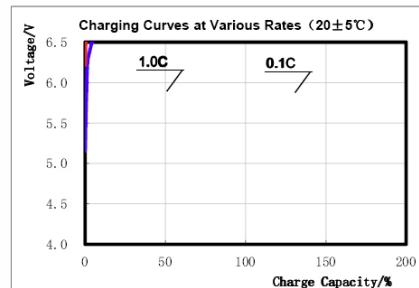

REFERENCE

Reference	Description
WNC700.18	BATTERY BESAM EMD 18V 700MAH NI-CD

Safety Warning : Use ONLY within the allowed parameters.

Do not short circuit or overload the battery. Charge only using an approved charger designed specifically to charge this battery.

Do not heat above maximum temperatures indicated. Never crush, mutilate, puncture or abuse the battery.

Do not dismantle the pack or disable any of the protective devices or circuits.

DO NOT USE THE BATTERY IF YOU SUSPECT IT MAY BE FAULTY OR DAMAGED.

