



Dimensions

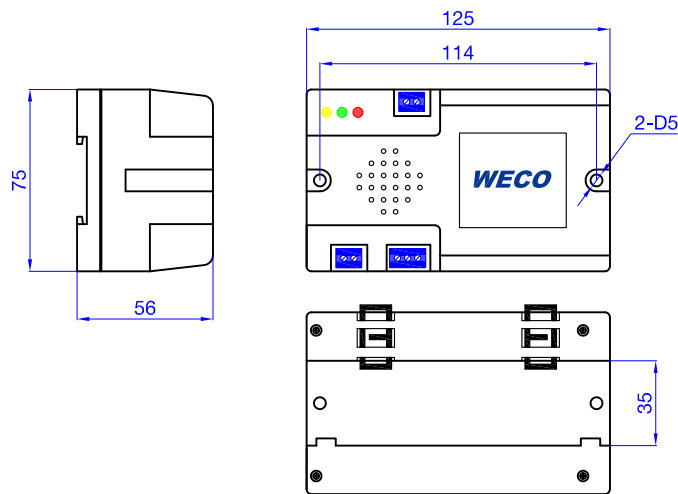

Statuts du câblage et des voyants LED

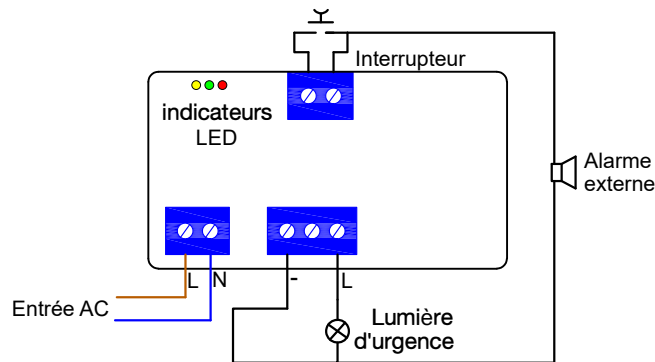

Indicateur LED	ON	Statuts
Jaune		En charge
Vert		Charge complète
Rouge		Urgence ou défaut


Caractéristiques techniques

Tension d'entrée	100-240VAC	Type de batterie	Li-ion
Puissance	10W	Capacité de la batterie	7.4V, 2000mAh
Tension de sortie	12VDC, 1.3A	Matériel du boîtier	ABS
Courant maximal	4.4A	Type de terminal	KF128-5.08
Puissance de secours	5W lumière + 2W alarme	Température de fonctionnement	-20°C a 50°C
Temps d'urgence	60min@5W	Température de stockage	-20°C a 80°C
Alarme interne	N/A	Durée de vie moyenne	30,000 heures
Temps de recharge	>10 heures	Poids	235g




Nous recommandons de charger la batterie tous les 6 mois.
Nous recommandons de remplacer la batterie tous les 4 ans.
Le remplacement des batteries Li-ion annule la garantie.

Dimensions

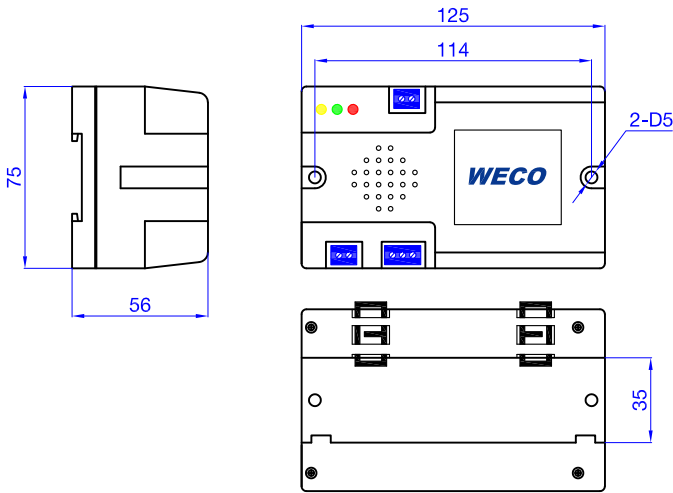

Wiring and LED indicator status

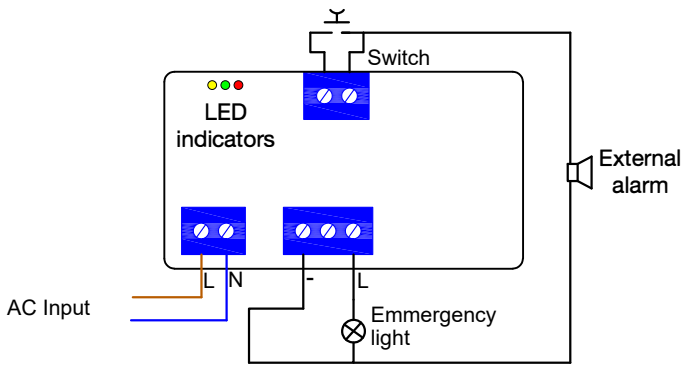

LED Indicator	ON	Status
Yellow		Charging
Green		Fully charged
Red		On emergency or faulty

Specification

Input voltage	100-240VAC	Battery type	Li-ion
AC power	10W	Battery capacity	7.4V, 2000mAh
Output	12VDC, 1.3A	Housing material	ABS
Peak current	4.4A	Terminal type	KF128-5.08
Emergency power	5W light + 2W alarm	Working temperature	-20°C a 50°C
Emergency time	60min@5W	Storage temperature	-20°C a 80°C
Internal alarm	N/A	Average lifespan	30,000 hours
Charging time	>10 hours	Weight	235g



We recommend charging the battery pack every 6 months.
We recommend replacing the battery pack every 4 years.
Replacing the Li-ion batteries will void the warranty.